


WFB17E0860CE For Industrial

■ Features

- 772 MHz and 860.5 MHz 2 in 1 SAW Filter for land mobile.
- Compact. (Typ. 3.0×3.0mm)
- Moisture Sensitivity Level 1 (MSL1)
- Low insertion attenuation and deep attenuation
- No external matching components required for operation at 50Ω
- Meets the requirements for re-flow profiling using lead-free solder.

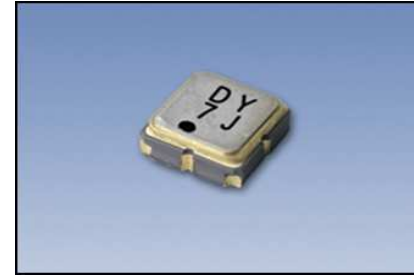





Pb free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863


■ Specifications

Nominal Frequency 1 (MHz)		772
Pass band 1 (MHz)		768 ~ 776
Insertion loss (dB)		768 ~ 776 MHz Max. 2.6
Attenuation / absolute value (dB)	1	431 ~ 604 MHz Min. 50
	2	733 ~ 752 MHz Min. 35
	3	804 ~ 847 MHz Min. 25
Nominal Frequency 2 (MHz)		860.5
Pass band 2 (MHz)		851 ~ 870
Insertion loss (dB)		851 ~ 870 MHz Max. 2.7
Attenuation / absolute value (dB)	1	483 ~ 676 MHz Min. 50
	2	804 ~ 822 MHz Min. 20
	3	898 ~ 918 MHz Min. 20
Operating Temp. Range		- 30 to + 70 °C

Characteristics

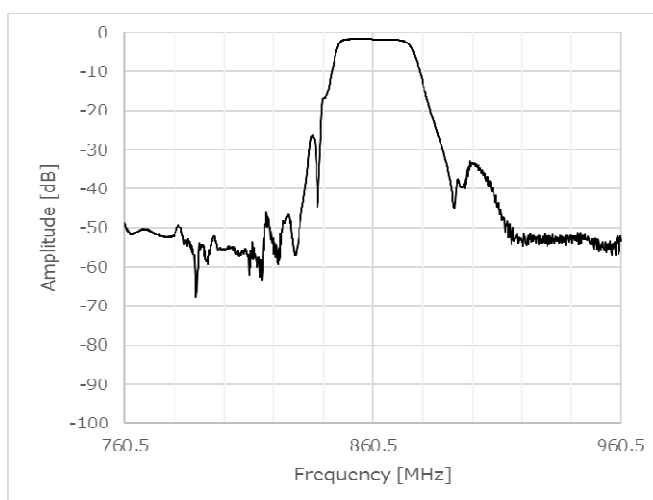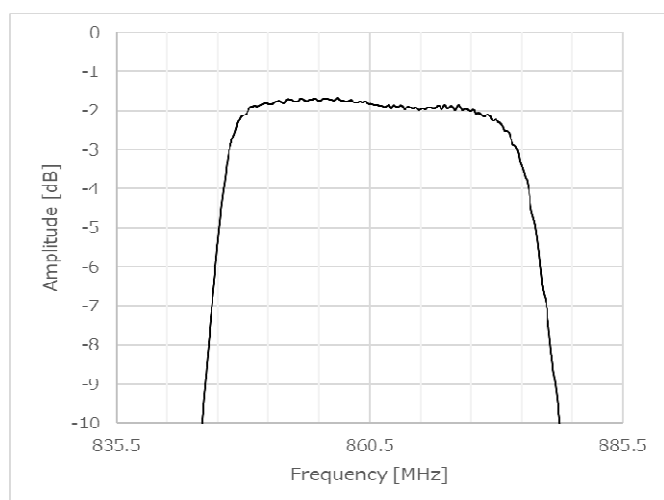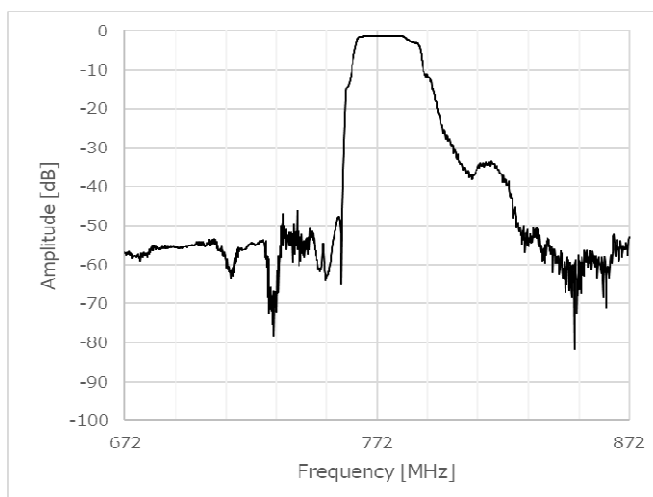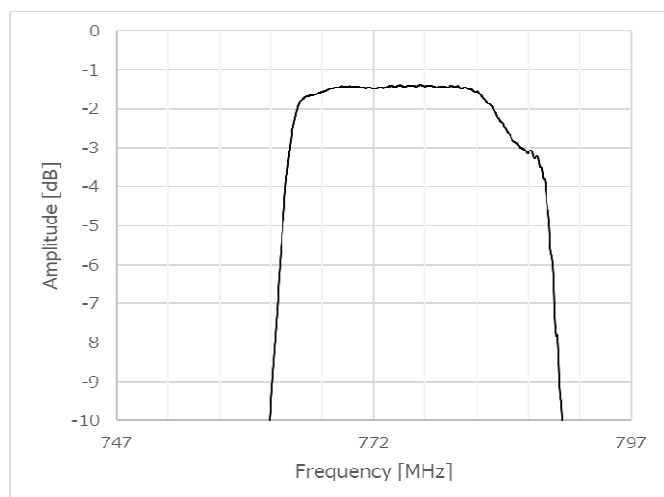

Dimensions

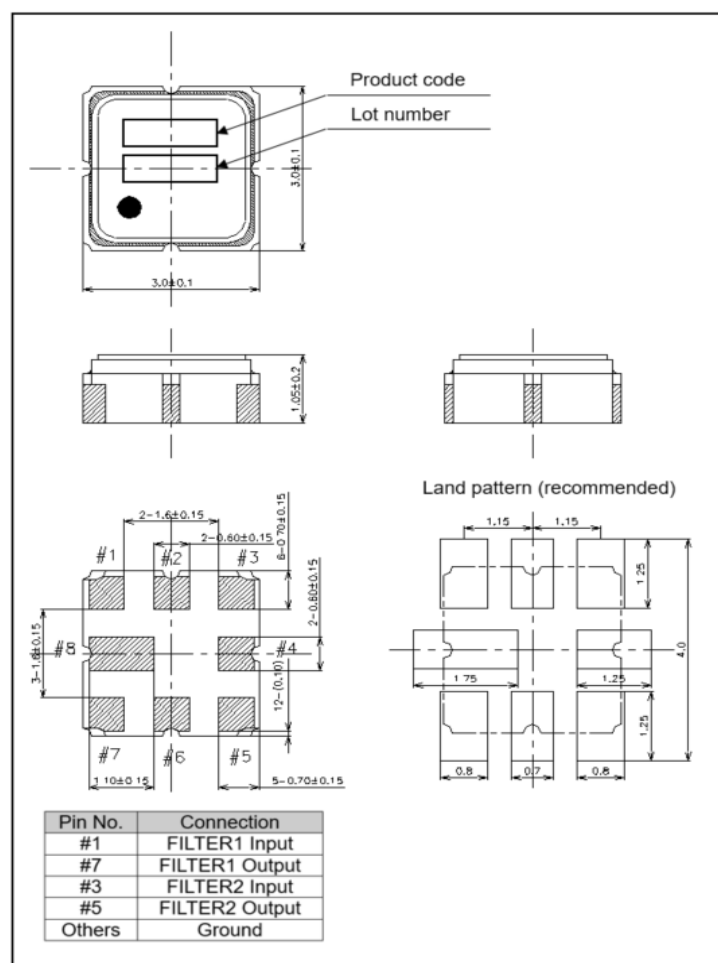

Matching Circuit

